

Overview

Shape the Future of QuickSpecs – Your Input Matters

HPE ProLiant Compute XD230

HPE introduces a scale-out system with a compact form factor to meet the changing demands of your workloads in HPC and enterprise data centers.

HPE ProLiant Compute XD230 System is a compact size platform that packs incredible performance and workload flexibility into a small datacenter space, while delivering the efficiencies of a shared infrastructure.

It is a 1U chassis system that supports Intel® Xeon® 6 processors with P-cores that deliver up to 2x higher HPC performance compared to the 5th Gen Intel Xeon processors. With the capability to scale up to 128 cores, 12 memory channels, and 96 PCIe lanes per socket, the Intel® Xeon® 6 processors address diverse HPC application needs, significantly reducing memory bandwidth bottlenecks with innovative Multiplexed Rank DIMMs (MRDIMM) delivering up to 8800 mega transfers per second (MT/s).


HPE ProLiant Compute XD230 delivers a complete HPC solution from chassis-scale to rack-scale, in a rack and roll fashion. It offers a complete, scalable solution for HPC customers everywhere, and ensures maximum performance at the lowest possible total cost of ownership. It comes with the flexibility of right-sized power and cooling options, including air cooling, closed loop cooling, direct liquid cooling and support for Rear Door Heat Exchanger (RDHX) and Adaptive Rack Cooling Solutions (ARCS.).

Built with Exascale-ready networking technologies, integrated storage, extensive software portfolio and management tools, HPE ProLiant Compute XD230 systems can enable customers to innovate and prepare for tomorrow's challenges.

What's New

- All new XD230 server
 - New 6th Generation Intel® Xeon® Scalable Processors (AP with P-cores) Support for up to 24 DDR5 6400MT/s DIMMs per 1 server Support for up to 24 DDR5 8800MT/s MRDIMMs per 1 server
 - Direct Liquid Cooling (DLC) option for HPE ProLiant Compute XD230 System comes ready to plug and play.
 - Supports up to two 3200W or 2400W redundant power supplies, delivering up to 6400W of power in a single node.
 - Features Slingshot 200Gbps and 400Gbps, InfiniBand NDR, and standard Ethernet, offering a range of HPC interconnect technologies.
 - Includes HPE Integrated Lights-Out (iLO) server management software.
 - Provides hot-pluggable, high-availability RAID M.2 boot options.
 - Compatible with OpenBMC through the iLO 6 Transfer of Ownership process.
-

Overview

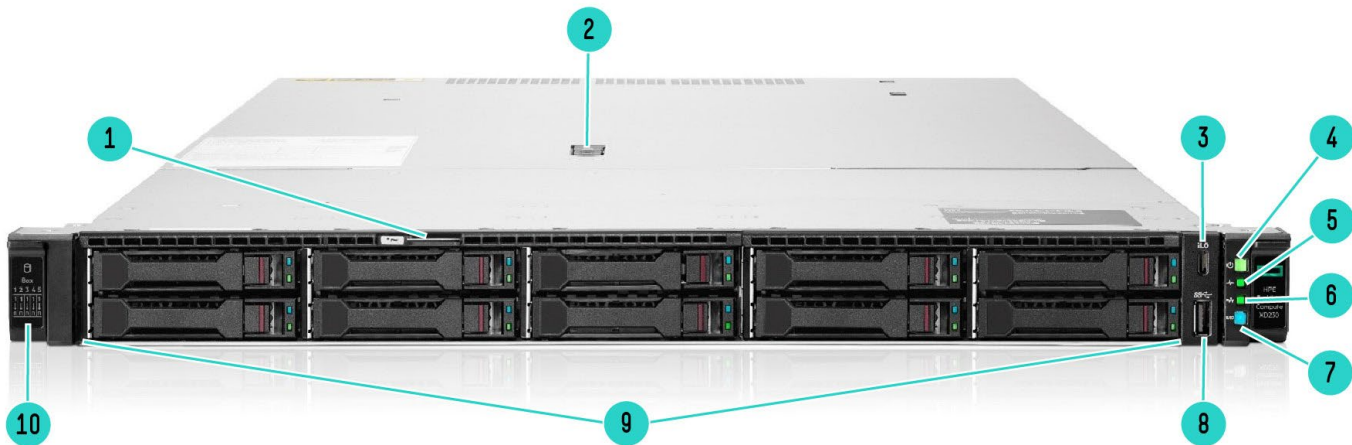


HPE ProLiant Compute XD230

Item Description

- 1. Serial number/iLO information pull tab
- 2. Quick removal access panel
- 3. iLO Service port
- 4. Power on/ Standby button/ LED
- 5. Health LED

Item Description

- 6. NIC status LED
- 7. UID button LED
- 8. USB 3.2 Gen1 port
- 9. 10x SFF drives
- 10. Drive support label

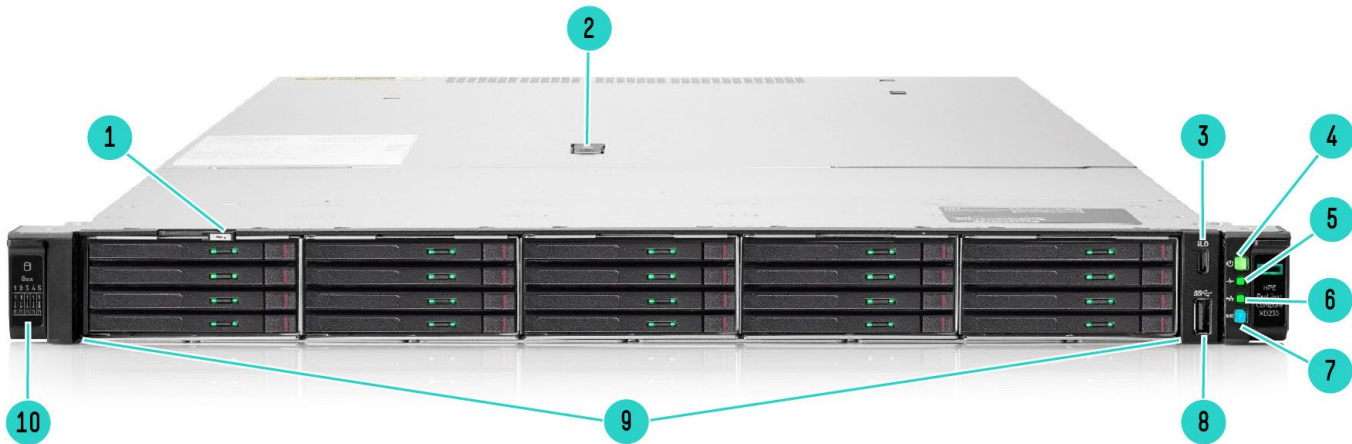

HPE ProLiant Compute XD230

Item Description


- 1. Serial number/iLO information pull tab
- 2. Quick removal access panel
- 3. iLO Service port
- 4. Power on/ Standby button/ LED
- 5. Health LED

Item Description

- 6. Nic LED
- 7. UID button LED
- 8. USB 3.2 Gen1 port
- 9. 20x EDSFF drives
- 10. Serial number/iLO information pull tab



Overview

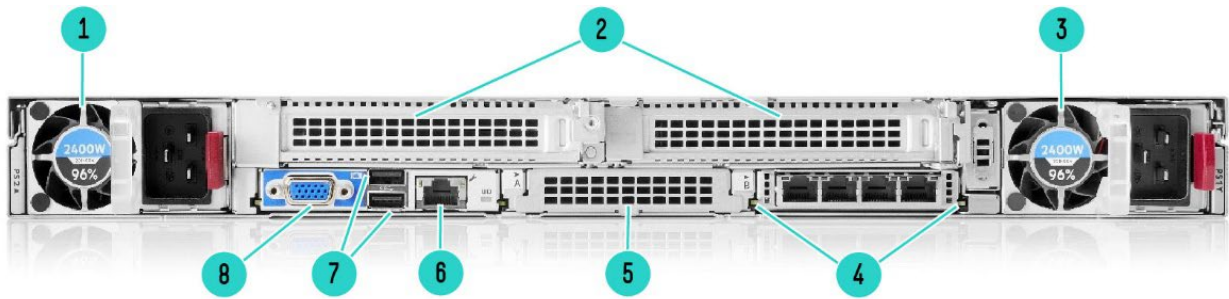


HPE ProLiant Compute XD230 Server Rear Panel Components

Item	Description
1.	Power supply 2
2.	Slot 1 & 2 x16 PCIe 5.0 – Full Height
Supported Options:	
2 FHHL (CLC) model (as shown)	
3 HHHL (CLC) model	
1 FHHL + 1 HHHL (DLC) model	
3.	Power supply 1
4.	OCP B slot

Item	Description
5.	OCP A slot
6.	iLO Management Port
7.	USB 3.2 Gen1 Ports
8.	Video (VGA) port



Overview

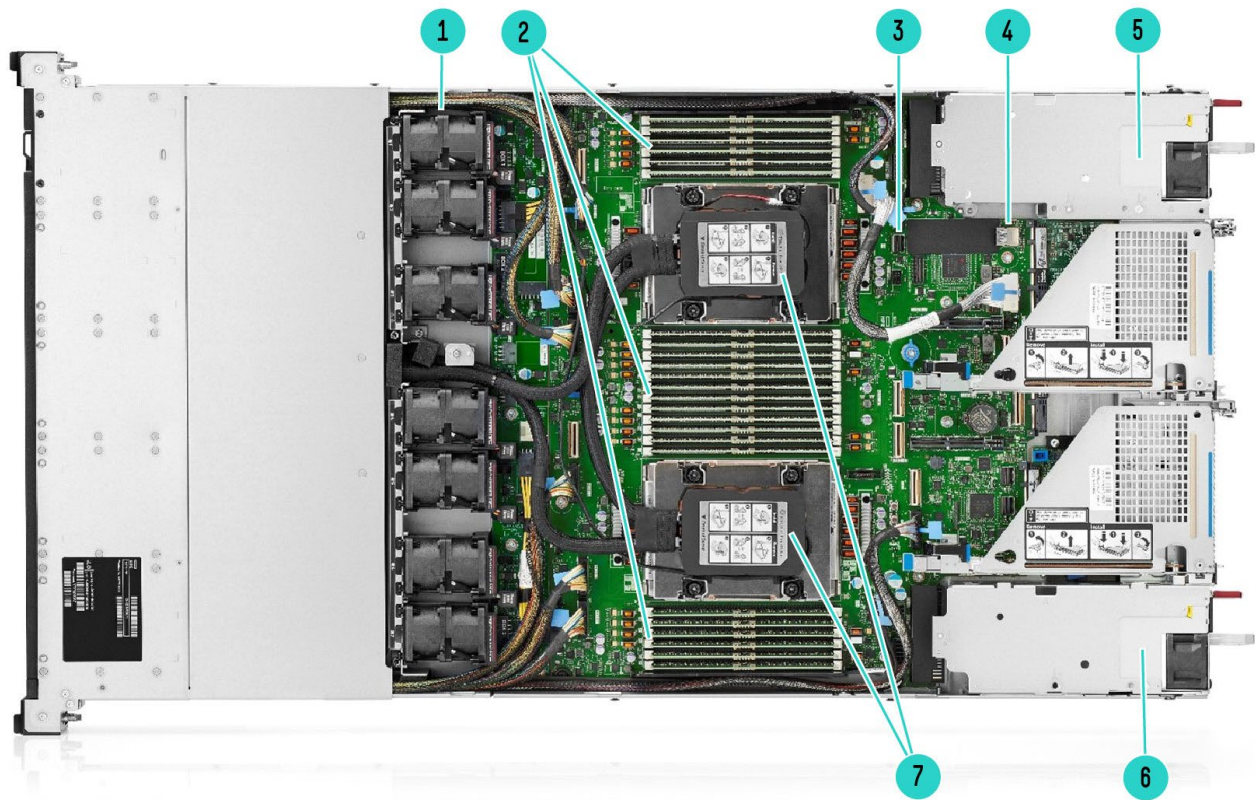

HPE ProLiant Compute XD230 – Internal View

Item	Description	Item	Description
1.	FAN #1 - #7	5.	Power supply 1
2.	DDR5 DIMM Slots (fully populated 24 DIMMs shown)	6..	Power supply 2
3.	Boot Optimized Storage Device 41 Connector (for NS204i-u signal)	7.	CPU 1 (top) and CPU 2 (bottom)
4.	Internal USB 3.2 Gen1 port		



Overview

Platform Information

Form Factor

- 1U rack

Chassis Types 20 EDSFF Carrier 1T (EC1) drive bays 10 SFF Basic Carrier (BC) drive bay

Each HPE ProLiant Compute XD230 Chassis is built with the following

- Supports up to two (2) power supplies for the chassis
 - Minimum of one (1) power supply required.
 - Five backplanes each with 2SFF NVMe drives
 - Or Five backplanes each with 4 EDSFF drives
-

HPE ProLiant Compute XD230 server

- 2P server built on the 6th Generation Intel® Xeon® Scalable Processors. With choices from 72-128 cores, up to 2.0 Ghz base and 3.9 Ghz turbo CPU speed and power ratings up to 500W
 - XD230 has 24 memory channels per server and supports 8800 MT/s memory, up to three PCIe Gen5 slots, and multiple networking options including high speed fabric.
 - Optional M.2 NVMe SSD : 2 x 480 GB (shipped with optional HPE NS204i-u Gen11 NVMe Hot Plug Boot Optimized Storage Device):
 - One iLO Management Port
-

Rack Airflow Requirements

HPE ProLiant Compute XD230 System

The increasing power of new high-performance processor technology requires increased cooling efficiency for rack-mounted servers. For maximum cooling, HPE racks are recommended to allow these racks to be fully loaded with servers using the latest processors. For detail information please see HPE ProLiant Compute XD230 System User Guide:

https://support.hpe.com/connect/s/search?language=en_US#q=XD2000

Notes:

- If a third-party rack is used, observe the following additional requirements to ensure adequate airflow and to prevent damage to the equipment.
 - When selecting Direct Liquid Cooling (DLC), HPE racks are required for factory integration.
 - Always use blanking panels to fill all remaining empty front panel U-spaces in the rack. This arrangement ensures proper airflow. Using a rack without blanking panels will result in improper cooling that can lead to thermal damage.
-



Standard Features

Processors (up to 2 of the following depending on the model)

Notes:

- All Intel® Xeon® processors can support up to 3TB of memory each on the HPE ProLiant Compute XD230 system
- Certain limitations may apply to select processors, please contact your HPE sales representative
- Please contact your HPE sales representatives for any questions on processor support needed
- Some processors may require selection of Direct Liquid cooling options

6 th Gen Intel® Xeon® Processor	Cores	Base Frequency	Max Frequency	Max Memory	Default TDP (W)	Cache	DDR5 Memory	MCR Memory
Xeon 6980P	128	2.0GHz	3.9GHz	3TB	500	504MB	6400 MT/s	8800 MT/s
Xeon 6979P	120	2.1GHz	3.9GHz	3TB	500	504MB	6400 MT/s	8800 MT/s
Xeon 6972P	96	2.4GHz	3.9GHz	3TB	500	480MB	6400 MT/s	8800 MT/s
Xeon 6960P	72	2.7GHz	3.9GHz	3TB	500	432MB	6400 MT/s	8800 MT/s
Xeon 6952P	96	2.3GHz	4GHz	3TB	350	480MB	6400 MT/s	8800 MT/s

On System Management Chipset

HPE iLO ASIC

Read and learn more in the iLO QuickSpecs

Memory

Type	DDR5 Registered (RDIMM) MCRDIMM
DIMM slots available	24 slots per server 12 channels per processor, 1 DIMM per channel
Maximum capacity (RDIMM)	3TB 24 x 128 GB @6400 MT/s

Notes: Memory DIMM availability with a server platform is dependent upon completion of certification testing

Expansion Slots & Riser Information

Full Height Riser FIO Cage Kit (P77595-B21)					
Option	Technology	Bus Width	Connector Width	Slot Form Factor	Source
1	PCIe 5.0	x16	x16	Full Height	CPU1 & 2
Low Profile Riser FIO Cage Kit (P77596-B21)					
Option	Technology	Bus Width	Connector Width	Slot Form Factor	Source
2	PCIe 5.0	x16	x16	Low Profile	CPU1 & 2

Notes:

- If One Quantity of 'FH Riser' is in the order, then customer can choose max of one 'LP Riser'.
- If Two Quantities of 'FH Riser' are in the orders, then customers cannot select 'LP Riser'.
- If No 'FH Riser' is in the order, then customers can select max of three 'LP Riser'.
- If Direct liquid cooling (HPE XD230 DLC FIO Kit) is in the order, If Riser Cards are selected, then only allowed combination of risers are 1 Quantity of 'LP Riser' and/or 1 Quantity of 'FH Riser'.



Standard Features

Maximum Internal Storage Per node

Drive	Capacity	Configuration
M.2 NVMe SSDs	960GB	2x 480GB

Internal Storage Devices

Optional M.2 NVMe SSD Mezz Riser Kit: 2 x 480 GB (shipped with optional HPE NS204i-u Gen11 NVMe Hot Plug Boot Optimized Storage Device)

Interfaces

USB Ports	2 external USB 3.2 Gen1 Port (O) 1 Internal USB 3.2 Gen1 port
Health LED	1
Power	1
UID	1
Do not remove LED	1

Industry Standard Compliance

- ACPI 6.3 Compliant
- PCIe 5.0 Compliant
- WOL Support
- Microsoft® Logo certifications
- PXE Support
- USB 3.0 Compliant (internal);
- SMBIOS 3.4
- UEFI 2.8
- Redfish API
- European Union Erp Lot 9 Regulation European Union (EU) eco-design regulations for server and storage products, known as Lot 9, establishes power thresholds for idle state, as well as efficiency and performance in active state which vary among configurations. HPE ProLiant Gen11 servers are compliant with Lot9 requirements. Please visit: <https://www.hpe.com/us/en/about/environment/msds-specs-more.html> for more information regarding HPE Lot 9 conformance.

Beginning on January 1st, 2024, units sold into the European Union (EU), European Economic Area (EEA), the United Kingdom, or Switzerland must include more efficient AC power supplies: 94% for multi-output and 96% for single-output. HPE Flexible Slot power supplies are single-output, and part numbers 865438-B21, P03178-B21, and P44712-B21 are 96% efficient, thus meeting requirements.

HPE is on target to fulfil compliant systems ahead of time and will begin enforcing these requirements in advance to satisfy requests with the current power supplies by the set deadline.

Power Specifications

To review typical system power ratings, please use the [HPE Power Advisor Tool](#)

For information on power specifications and technical content visit: <https://www.hpe.com/info/qs>



Standard Features

HPE ProLiant Compute XD230 Server UEFI

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time.

The UEFI System utilities is embedded in the system ROM. Its features enable you to perform a wide range of configuration activities, including:

- Configuring system devices and installed options.
- Enabling and disabling system features.
- Displaying system information.
- Selecting the primary boot controller or partition.
- Configuring memory options.
- Launching other preboot environments.

HPE ProLiant Compute XD230 servers with UEFI can provide:

- Secure Boot that enables the system firmware, option card firmware, operating systems, and software collaborate to enhance platform security.
- An Embedded UEFI Shell that provides a preboot environment for running scripts and tools.
- Boot support for option cards that only support a UEFI option ROM.

UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI).

Learn more at: <http://www.hpe.com/servers/uefi>

Software Portfolio for HPE ProLiant Compute XD230s

Operating Systems and Virtualization Software Support for XD230 Servers

- Red Hat Enterprise Linux (RHEL) 9.4, 9.5
- SUSE Linux Enterprise Server (SLES) 15 SP6
- Ubuntu (24.04)
- Windows Server 2022, Windows Server 2025

Notes: For more information on Hewlett Packard Enterprise Certified and Supported Servers for OS and Virtualization Software and latest listing of software drivers available for your server.

<https://www.hpe.com/us/en/servers/server-operating-systems.html>

Fabric software

- Mellanox UFM

Server Management

HPE iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality.

HPE OneView Advanced

HPE OneView Advanced offers a sophisticated level of automation to infrastructure management by taking a template driven approach to provisioning, updating, and integrating compute, storage, and networking infrastructure. It provides full-featured licenses which can be purchased for managing multiple HPE server generations. To learn more visit

<http://www.hpe.com/info/oneview>.

HPE Performance Cluster Manager

Fully integrated system management solution offering the capabilities you need to manage your HPE Linux®-based high performance computing (HPC) clusters.



Standard Features

HPE Performance Cluster Manager aggregates system metrics and remote management.

The software provides:

- System setup
 - Hardware monitoring and management including GPU management
 - Image management and software updates
 - Power management
 - Integration with ISV & open source software solutions
 - AIOps capabilities
-

HPE Message Passing Interface (MPI) is an MPI development environment designed to enable the development and optimization of high-performance computing (HPC) applications. . This software leverages a scalable MPI library and boosts performance of existing applications without requiring recompilation.

Additional 3rd party software development tools:

- AMD AOCC
 - Intel® oneAPI
 - GNU Compiler Collection
 - Perforce® TotalView®
 - Mellanox HPC-X
-

Security

- UEFI Secure Boot and Secure Start support
 - HPE XD Hardware Root of Trust
 - Tamper-free updates – components digitally signed and verified
 - Secure Recovery – recover critical firmware to known good state on detection of compromised firmware
 - TPM (Trusted Platform Module) Module Kit option
 - HPE ProLiant Compute XD230 supports OpenSSL 3.0
 - Runtime Firmware Validation – Periodically scan essential firmware for compromised code during runtime
-

Liquid Cooling Overview

Liquid cooling provides effective cooling for the most powerful chips while they operate at their highest possible performance. It also provides very energy efficient cooling and enables higher rack densities.

Selecting DLC Options

HPE ProLiant Compute XD230 servers can be equipped with Direct Liquid Cooling (DLC) by selecting from the following options, in addition to normal server configuration menu options:

Notes: *highlighted options are specific to ARCS configurations only

Standard Features

SKU Description	HPE SKU	Selection Criteria	Comments
HPE 42U 800 mm x 1200 mm Enterprise G2 Shock rack	P9K46A	One (1) per rack	DLC compatible 42U HPE racks
HPE 48U 800 mm x 1200 mm Enterprise G2 Shock rack	P9K58A		DLC compatible 48U HPE racks
HPE ARCS 48U 800 mm x 1600 mm Rack*	R8N95A		DLC compatible 48U HPE ARCS racks
HPE Cray XD 75kW 208V FIO In-Rack Coolant Distribution Unit	P55832-B21	One (1) per rack	4U CDU mounted at the bottom of the rack
HPE Cray Fill and Drain FIO Hand Pump Kit	P59920-B21	One (1) for multiple racks	Filling kit for CDU. One can be used to service multiple CDUs
HPE Cray 4U CDU 2.5m FIO Leak Detection Kit	P55834-B21	One (1) per rack	Additional external leak detection cable (is default but can be removed if not needed). Connects to rear of CDU and can be routed to desired location (CDU already contains internal leak detection)
HPE Cray G2 Rack 25.4mm SAN to FD83 Secondary FIO Water Hose Kit	P56290-B21	One (1) per rack	1" inner diameter hose kit connects the CDU to the rack manifold in a standard HPE G2 rack
HPE Cray ARCS 25.4mm SAN to FD83 Secondary FIO Water Hose Kit*	P56291-B21		1" inner diameter hose kit connects the CDU to the rack manifold in a HPE ARCS rack
HPE Cray 25mm 1.83m Primary FIO Water Hose Kit with Insulation	P56286-B21	One (1) per rack	1" inner diameter insulated hose kit connects the CDU to the facility water piping below the rack
HPE Cray 25mm 3.66m Primary FIO Water Hose Kit with Insulation	P56287-B21		1" inner diameter Insulated hose kit connects the CDU to the facility water piping above the rack
HPE Cray 38mm 1.83m Primary FIO Water Hose Kit	P59224-B21		1.5" inner diameter Non-insulated hose kit connects the CDU to the facility water piping below the rack
HPE Cray 38mm 3.66m Primary FIO Water Hose Kit	P59225-B21		1.5" inner diameter Non-insulated hose kit connects the CDU to the facility water piping above the rack
HPE Cray 42U 72-node Direct Liquid Cooling FD83 SCG03 FIO Rack Manifold	P56288-B21	One (1) per rack	42U rack manifold with connections for 72 servers
HPE Cray 48U 84-node Direct Liquid Cooling FD83 SCG03 FIO Rack Manifold	P56289-B21		48U rack manifold with connections for 84 servers
HPE XD230 DLC FIO Kit	P76166-B21	One (1) per server	
HPE XD230 DLC FIO Cage Kit	P77598-B21		



Standard Features

Cooling options

The following optional cooling technologies are compatible with both air cooled and liquid cooled HPE servers.

HPE Adaptive Rack Cooling System (ARCS)

HPE ARCS can provide advanced cooling for HPE ProLiant Compute XD230 servers using facility water.

This cooling solution supports up to 4 full racks (servers, networking or storage) and manages 100% of the server heat in a completely enclosed cluster. It provides cool air for inlet side and manages exhaust heat, transferring it to facility water cooling. When servers with DLC are added to ARCS, the highest rack density is possible, with 100% heat transfer to facility water.

This option can be used for air cooled HPE ProLiant Compute XD230 racks or in combination with DLC to cool high density racks.

For additional information, please see the HPE Adaptive Rack Cooling System QuickSpecs [here](#).

HPE Rear Door Heat Exchanger (RDHX)

HPE RDHX can neutralize warm exhaust air from HPE ProLiant Compute XD230 servers using facility water.

This cooling solution attaches to the back of a single rack (servers, networking or storage) and neutralizes the hot air existing the rack by transferring the heat to facility water cooling. When servers with DLC are added to RDHX, the highest rack density is possible, with 100% heat transfer to facility water.

This option can be used for air cooled HPE ProLiant Compute XD230 racks or in combination with HPE ProLiant Compute XD230 DLC to cool high density racks.

For additional information, please visit HPE Rear Door Heat Exchanger QuickSpecs [here](#).



Service and Support

HPE Services

No matter where you are in your digital transformation journey, you can count on HPE Services to deliver the expertise you need when, where and how you need it. From planning to deployment, ongoing operations and beyond, our experts can help you realize your digital ambitions.

<https://www.hpe.com/services>

Consulting Services

No matter where you are in your journey to hybrid cloud, experts can help you map out your next steps. From determining what workloads should live where, to handling governance and compliance, to managing costs, our experts can help you optimize your operations.

<https://www.hpe.com/services/consulting>

HPE Managed Services

HPE runs your IT operations, providing services that monitor, operate, and optimize your infrastructure and applications, delivered consistently and globally to give you unified control and let you focus on innovation.

[HPE Managed Services | HPE](#)

Operational services

Optimize your entire IT environment and drive innovation. Manage day-to-day IT operational tasks while freeing up valuable time and resources. Meet service-level targets and business objectives with features designed to drive better business outcomes.

<https://www.hpe.com/services/operational>

HPE Complete Care Service

HPE Complete Care Service is a modular, edge-to-cloud IT environment service designed to help optimize your entire IT environment and achieve agreed upon IT outcomes and business goals through a personalized experience. All delivered by an assigned team of HPE Services experts. HPE Complete Care Service provides:

- A complete coverage approach -- edge to cloud
- An assigned HPE team
- Modular and fully personalized engagement
- Enhanced Incident Management experience with priority access
- Digitally enabled and AI driven customer experience

<https://www.hpe.com/services/completecure>

HPE Tech Care Service

HPE Tech Care Service is the operational support service experience for HPE products. The service goes beyond traditional support by providing access to product specific experts, an AI driven digital experience, and general technical guidance to not only reduce risk but constantly search for ways to do things better. HPE Tech Care Service delivers a customer-centric, AI driven, and digitally enabled customer experience to move your business forward. HPE Tech Care Service is available in three response levels. Basic, which provides 9x5 business hour availability and a 2-hour response time. Essential which provides a 15-minute response time 24x7 for most enterprise level customers, and Critical which includes a 6-hour repair commitment where available and outage management response for severity 1 incidents.

<https://www.hpe.com/services/techcare>



Service and Support

HPE Lifecycle Services

HPE Lifecycle Services provide a variety of options to help maintain your HPE systems and solutions at all stages of the product lifecycle. A few popular examples include:

- Lifecycle Install and Startup Services: Various levels for physical installation and power on, remote access setup, installation and startup, and enhanced installation services with the operating system.
- HPE Firmware Update Analysis Service: Recommendations for firmware revision levels for selected HPE products, taking into account the relevant revision dependencies within your IT environment.
- HPE Firmware Update Implementation Service: Implementation of firmware updates for selected HPE server, storage, and solution products, taking into account the relevant revision dependencies within your IT environment.
- Implementation assistance services: Highly trained technical service specialists to assist you with a variety of activities, ranging from design, implementation, and platform deployment to consolidation, migration, project management, and onsite technical forums.
- HPE Service Credits: Access to prepaid services for flexibility to choose from a variety of specialized service activities, including assessments, performance maintenance reviews, firmware management, professional services, and operational best practices.

Notes: To review the list of Lifecycle Services available for your product go to:

<https://www.hpe.com/services/lifecycle>

For a list of the most frequently purchased services using service credits, see the [HPE Service Credits Menu](#)

Other Related Services from HPE Services:

HPE Education Services

Training and certification designed for IT and business professionals across all industries. Broad catalogue of course offerings to expand skills and proficiencies in topics ranging from cloud and cybersecurity to AI and DevOps. Create learning paths to expand proficiency in a specific subject. Schedule training in a way that works best for your business with flexible continuous learning options.

<https://www.hpe.com/services/training>

Defective Media Retention

An option available with HPE Complete Care Service and HPE Tech Care Service and applies only to Disk or eligible SSD/Flash Drives replaced by HPE due to malfunction.

Consult your HPE Sales Representative or Authorized Channel Partner of choice for any additional questions and services options.

Parts and Materials

HPE will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

How to Purchase Services

Services are sold by Hewlett Packard Enterprise and Hewlett Packard Enterprise Authorized Service Partners:

- Services for customers purchasing from HPE or an enterprise reseller are quoted using HPE order configuration tools.
- Customers purchasing from a commercial reseller can find services at <https://ssc.hpe.com/portal/site/ssc/>



Service and Support

AI Powered and Digitally Enabled Support Experience

Achieve faster time to resolution with access to product-specific resources and expertise through a digital and data driven customer experience

Sign into the HPE Support Center experience, featuring streamlined self-serve case creation and management capabilities with inline knowledge recommendations. You will also find personalized task alerts and powerful troubleshooting support through an intelligent virtual agent with seamless transition when needed to a live support agent.

<https://support.hpe.com/hpesc/public/home/signin>

Consume IT On Your Terms

HPE GreenLake edge-to-cloud platform brings the cloud experience directly to your apps and data wherever they are—the edge, colocations, or your data center. It delivers cloud services for on-premises IT infrastructure specifically tailored to your most demanding workloads. With a pay-per-use, scalable, point-and-click self-service experience that is managed for you, HPE GreenLake edge-to-cloud platform accelerates digital transformation in a distributed, edge-to-cloud world.

- Get faster time to market
- Save on TCO, align costs to business
- Scale quickly, meet unpredictable demand
- Simplify IT operations across your data centers and clouds

To learn more about HPE Services, please contact your Hewlett Packard Enterprise sales representative or Hewlett Packard Enterprise Authorized Channel Partner. Contact information for a representative in your area can be found at "Contact HPE"

<https://www.hpe.com/us/en/contact-hpe.html>

For more information

<http://www.hpe.com/services>



Configuration Information

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

Notes: FIO indicates that this option is only available as a factory installable option.

Step 1: Choose the Server

HPE ProLiant Compute XD230 Configure-to-order Server

P74169-B21

Step 2: Choose Processor option

Notes: Certain limitations may apply to select processors, please contact your HPE sales representative

INTEL Processors – Factory Integrated Processor Kit for XD230

Intel Xeon 6980P 2.0GHz 128-core 500W Processor Kit for HPE ProLiant Compute XD	P76802-B21
Intel Xeon 6979P 2.1GHz 120-core 500W Processor Kit for HPE ProLiant Compute XD	P76803-B21
Intel Xeon 6972P 2.4GHz 96-core 500W Processor Kit for HPE ProLiant Compute XD	P76804-B21
Intel Xeon 6960P 2.7GHz 72-core 500W Processor Kit for HPE ProLiant Compute XD	P76805-B21
Intel Xeon 6952P 2.1GHz 96-core 400W Processor Kit for HPE ProLiant Compute XD	P76806-B21

Notes: Mixing of Processors is not allowed. If Two Processors are in the order along with 'HPE XD230 CLC FIO Kit' then max of 2 QTY of 'HPE DL3XX G12 1U 4EDSFF NVMe Stck BP Kit' are allowed per server.

Step 3: Choose Additional Options from Core and Additional Options sections below

HPE ProLiant Compute XD230 Memory

Registered DIMMs and MCRDIMM for XD230

HPE 32GB (1x32GB) Dual Rank x8 DDR5-6400 CAS-52-52-52 EC8 Registered Smart Memory Kit	P69727-H21
HPE 64GB (1x64GB) Dual Rank x4 DDR5-6400 CAS-52-52-52 EC8 Registered Smart Memory Kit	P69728-H21
HPE 128GB (1x128GB) Dual Rank x4 DDR5-6400 CAS-52-52-52 EC8 Registered Smart Memory Kit	P69730-H21
HPE 32GB (1x32GB) Dual Rank x8 DDR5-88/44 CAS-36-36-36 EC8 Multiplexed Rank Smart Memory Kit	P76826-H21
HPE 64GB (1x64GB) Dual Rank x4 DDR5-88/44 CAS-36-36-36 EC8 Multiplexed Rank Smart Memory Kit	P76828-H21
HPE Cray XD 32GB (1x32GB) Dual Rank x8 DDR5-4800 Registered Standard Memory Kit	P46968-H21
HPE Cray XD 64GB (1x64GB) Dual Rank x4 DDR5-4800 Registered Standard Memory Kit	P46970-H21
HPE Cray XD 128GB (1x128GB) Quad Rank x4 DDR5-4800 Registered 3DS Standard Memory Kit	P46972-H21

Notes:

- Mixing of Memory is not allowed.
- Requires the selection of 'HPE XD230 DLC FIO Kit'
- 'If this Memory is selected along with 'HPE XD230 CLC FIO Kit' then max of 2 QTY of 'HPE DL3XX G12 1U 4EDSFF NVMe Stck BP Kit' are allowed per server.

Drive Cage

HPE ProLiant Compute DL3XX Gen12 1U 4EDSFF NVMe Stacking Backplane Kit	P72221-B21
HPE ProLiant Compute DL3XX Gen12 1U 2SFF x4 Tri-Mode U.3 Stacking Backplane Kit	P72223-B21



Configuration Information

Step 7: Choose Additional Factory Integrated Options

Hard Drives

Hot Plug EDSFF

HPE 1.92TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 CD8P SSD	P69234-B21
HPE 3.84TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 CD8P SSD	P69237-B21
HPE 7.68TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 CD8P SSD	P69239-B21
HPE 1.6TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 CD8P SSD	P69241-B21
HPE 3.2TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 CD8P SSD	P69243-B21
HPE 6.4TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 CD8P SSD	P69245-B21
HPE 15.36TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 CD8P SSD	P69546-B21
HPE 3.84TB NVMe Gen5 High Performance Read Intensive E3S EC1 PS1010 SSD	P70392-B21
HPE 7.68TB NVMe Gen5 High Performance Read Intensive E3S EC1 PS1010 SSD	P70395-B21
HPE 15.36TB NVMe Gen5 High Performance Read Intensive E3S EC1 PS1010 SSD	P70397-B21
HPE 3.2TB NVMe Gen5 High Performance Mixed Use E3S EC1 PS1030 SSD	P70399-B21
HPE 6.4TB NVMe Gen5 High Performance Mixed Use E3S EC1 PS1030 SSD	P70401-B21
HPE 12.8TB NVMe Gen5 High Performance Mixed Use E3S EC1 PS1030 SSD	P70403-B21
HPE 3.2TB NVMe Gen5 High Performance Mixed Use E3S EC1 Self-encrypting FIPS 140-3 CM7 SSD	P70669-B21
HPE 6.4TB NVMe Gen5 High Performance Mixed Use E3S EC1 Self-encrypting FIPS 140-3 CM7 SSD	P70672-B21
HPE 7.68TB NVMe Gen5 High Performance Read Intensive E3S EC1 Self-encrypting FIPS 140-3 CM7 SSD	P70674-B21

Notes:

- Requires the selection of '4EDSFF NVMe Stck BP Kit'.
- Total number of EDSFF Drives allowed per server depends on number of 'EDSFF Drive Cage' ordered. One 'EDSFF Drive cage' can support up to 4 EDSFF Drives, consider this during the total number of EDSFF Drives allowed per server.

Hot Plug SFF

HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 Self-encrypting FIPS 140-3 CM7 SSD	P61019-B21
HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 Self-encrypting FIPS 140-3 CM7 SSD	P61027-B21
HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 Self-encrypting FIPS 140-3 CM7 SSD	P61035-B21
HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 Self-encrypting FIPS 140-3 CM7 SSD	P61043-B21
HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 Self-encrypting FIPS 140-3 CM7 SSD	P61051-B21
HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 Self-encrypting FIPS 140-3 CM7 SSD	P61059-B21
HPE 1.92TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	P63829-H21
HPE 3.84TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	P63833-H21
HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	P63837-H21
HPE 15.36TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 CM7 SSD	P63841-H21
HPE 1.6TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	P63845-H21
HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	P63849-H21
HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 CM7 SSD	P63853-H21
HPE 960GB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	P64842-H21
HPE 1.92TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	P64844-H21
HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	P64846-H21
HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	P64848-H21
HPE 800GB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	P64999-H21
HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	P65007-H21

Configuration Information

HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	P65015-H21
HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	P65023-H21
HPE 15.36TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static SPDM Multi Vendor SSD	P69255-H21
HPE 3.2TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PS1030 SSD	P70426-H21
HPE 6.4TB NVMe Gen4 High Performance Mixed Use SFF BC U.3 PS1030 SSD	P70428-H21
HPE 7.68TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PS1010 SSD	P70434-B21
HPE 15.36TB NVMe Gen4 High Performance Read Intensive SFF BC U.3 PS1010 SSD	P70436-B21

Notes:

- Requires the selection of '2SFF x4 TM Stck BP Kit'
- Total number of SFF Drives allowed per server depends on number of 'SFF Drive Cage' ordered. One 'SFF Drive cage' can support up to 2 SFF Drives, consider this during the total number of SFF Drives allowed per server.

Networking

Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE	P08443-B21
Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 Adapter for HPE	P21112-B21
Mellanox MCX623106AS-CDAT Ethernet 100Gb 2-port QSFP56 Adapter for HPE	P25960-B21
Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE	P10097-B21
Intel E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE	P10106-B21
Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE	P10115-B21
Intel E810-CQDA2 Ethernet 100Gb 2-port QSFP28 OCP3 Adapter for HPE	P22767-B21
Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE	P26256-B21
Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 OCP3 Adapter for HPE	P26269-B21
Intel E810-XXVDA4 Ethernet 10/25Gb 4-port SFP28 OCP3 Adapter for HPE	P41614-B21
Mellanox MCX631432AS-ADAI Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE	P42041-B21

HPE Performance Cluster Manager

For additional information, please visit HPE Performance Cluster Manager QuickSpecs [here](#)

HPE Performance Cluster Manager 1 Node 3yr 24x7 Support Perpetual E-LTU	Q9V60AAE
---	----------

Notes:

- One license per node
- Includes three years of support
- This is an electronic license
- This is a perpetual license. The Software will continue working even when the support term ends

HPE Performance Cluster Manager 1 Node 3yr 24x7 Support Perpetual LTU	Q9V60A
---	--------

Notes:

- One license per node.
- Includes three years of support.
- This is a perpetual license. The software will continue working even when the support term ends.

HPE Performance Cluster Manager FIO Software	Q9V61A
--	--------

Notes:

- This SKU does not include the license. Please order with Q9V60AAE.
- Order one per node

HPE Performance Cluster Manager Media Kit	Q9V62A
---	--------



Configuration Information

Notes: One media kit per solution.

HPE Power Distribution Units

Power Distribution Units (PDUs) are an integral piece to this data center solution and HPE offers several types. Basic PDUs provide reliable power with 0U or 1U installation options. Metered PDUs have added intelligence to precisely track power usage and switched PDUs provide both local and remote power management. There are additional metered PDUs that are recommended for this solution that are not part of the mainstream PDU product offering. They are as follows:

HPE Metered 3Ph 57.6kVA/60309 100A 5-wire 80A/230V Outlets (3) C13 (18) C19/Vertical NA PDU	880460-B21
HPE Metered 3Ph 34.5kVA/60309 60A 5-wire 48A/230V Outlets (3) C13 (18) C19/Vertical NA FIO PDU	880461-B21
HPE Cray Supercomputer 60A 415V 3 Phase 24 CX PDU	R4N30A
HPE Mtrd 3P 69.1kVA 125A 96A230V FIO PDU	880462-B21
HPE Metered 3Ph 45.1kVA/60309 63A 5-wire 63A/230V Outlets (3) C13 (18) C19/Vertical INTL FIO PDU	880463-B21
HPE Cray Supercomputer 63A 400V 3 Phase 24 CX PDU	R4N29A



Technical Specifications

HPE ProLiant Compute XD230		
Dimensions	Height	1.75 in (4.45 cm)
	Width	19 in (48.26 cm)
	Depth	36.33 in (92.28 cm)
Shipping Dimensions	Height	9.52 in (244.2 cm)
	Width	23.6 in (60 cm)
	Depth	43.3 in (110 cm)
Net Weight		51.41 lbs (23.32 kg)
Ship Weight	Approximate – 10 SFF drive configuration	78.37 lbs (35.55 kg)
System Inlet Temperature Standard Operating Support	10° to 35°C (50° to 95°F)	At sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed.
Extended Ambient Operating Support	10° to 5°C (50° to 41°F) and 35° to 40°C (95° to 104°F)	System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F). For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: http://www.hpe.com/servers/ashrae For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: http://www.hpe.com/servers/ashrae System performance may be reduced if operating in the extended ambient operating range or with a fan fault.
	-30° to 60°C (-22° to 140°F).	Maximum rate of change is 20°C/hr (36°F/hr).
Relative Humidity (non-condensing) Operating	8% to 90%	Relative humidity (Rh), 28°C maximum wet bulb temperature, non-condensing.
Non-operating	5 to 95%	Relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.
Altitude Operating	3050 m (10,000 ft).	This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).
Non-operating	9144 m (30,000 ft).	Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

TCO Certified

Environmental-friendly Products and Approach – End-of-life Management and Recycling

Hewlett Packard Enterprise offers end-of-life **product return, trade-in, and recycling programs**, in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE Directive (2012/19/EU) requires manufacturers to provide treatment information for each product type for use by treatment facilities. Information about product disassembly instructions can be found [here](#).)

These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

TCO Certified

TCO Certified The HPE ProLiant XL225n servers has been TCO Certified. All HPE TCO Certified products can be found on TCO Certified Product Finder. More information on TCO Certified can be downloaded here :

<https://www.hpe.com/us/en/about/environment/eco-labels.html>



Summary of Changes

Date	Version History	Action	Description of Change
28-Jul-2025	<u>Version 7</u>	Changed	Survey Link Updated
12-Jun-2025	<u>Version 6</u>	Changed	Configuration Information section was updated
27-May-2025	<u>Version 5</u>	Changed	Overview and Standard Features sections were updated
28-Apr-2025	<u>Version 4</u>	Changed	Overview and Standard Features sections were updated
07-Apr-2025	<u>Version 3</u>	Changed	Overview, Standard Features and Configuration Information sections were updated
03-Mar-2025	<u>Version 2</u>	Changed	Overview and Standard Features sections were updated
03-Feb-2025	<u>Version 1</u>	New	New QuickSpecs



Copyright

Make the right purchase decision.
Contact our presales specialists.

 Chat now (sales)

 Call now

Shape the Future of QuickSpecs – Your Input Matters

 Get updates



© Copyright 2025 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation.
Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries.
AMD Opteron™ is a US registered trademark of AMD Corporation.

a00073557enw - 16505 - Worldwide - V7 - 28-July-2025